

TECHNICAL DATA SHEET
ECO PRO LOCKERS
GYM SERIES





CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 0.6 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

Initial and adds system.

Easy assembly with screws and screw nuts. Extendable as you need (screws and screw nuts included).

The locker is individually packaged in a plastic and cardboard box. The starter pack contains assembly instructions.

Side panels, tops, socles and separations

Painted in grey RAL 7035 Micro-textured paint finish. Minimum thickness of 50 micrometer.

Metal doors

Painted in blue RAL 5010 or grey RAL 7035, micro-textured finish.

Minimum thickness of 50 microns.

Doors with perimetric double folding.

Borders without cutting edges. Hidden hinges.

With name-card holder.

With ventilation rosettes.

Chromed standard cylinder locks with two keys per lock.

Backpanel, shelves and coat rod

Made of galvanized steel, quality DX51D according to the norm EN-10346.

Shelf and coat rod at the ECOV-Series.

Coat rod at the ECOT-Series.

Bench

Made of steel tube of 1.5 mm thickness.

Painted in grey RAL 7035 Micro-textured finish. Minimum thickness of the coating: 50 microns.

Welded structure.

Slats made of pine wood (90 mm width x 16 mm thickness) recovered with polyurethane varnish, quality: "Flanders V". Wood coming from sustainable forrests with Chain of Custody Certification FSC.

PVC ferrules included.

Includes steel screws to attach the bench to the locker.

It is served packed in plastic and cardboard.






METALLIC COLOURS



RAL 9010
Pure white
Código HEX: #f1ece1



RAL 9001
Cream white
Código HEX: #e9e0d2



RAL 1017
Saffron yellow
Código HEX: #f6a950



RAL 1021
Rapeseed yellow
Código HEX: #f6b600



RAL 2004
Pure orange
Código HEX: #e25303



RAL 4010
Magenta
Código HEX: #bc4077



RAL 3017
Pink
Código HEX: #cb555d



RAL 3000
Red
Código HEX: #a72920



RAL 3005
Wine red
Código HEX: #59191f



RAL 4005
Lilac
Código HEX: #76689a



RAL 6029
Mint green
Código HEX: #006f3d



RAL 6034
Pastel turquoise
Código HEX: #7aacac



RAL 5015
Sky blue
Código HEX: #007cb0



RAL 5023
Distant blue
Código HEX: #42698c



RAL 5010
Gencana blue
Código HEX: #004f7c



RAL 8025
Pale brown
Código HEX: #755847




RAL 7035
Luminous grey
Código HEX: #c5c7c4




RAL 9006
White aluminium
Código HEX: #a1a1a0



RAL 7036
Platinum grey
Código HEX: #979392




RAL 7016
Anthracite grey
Código HEX: #383e42



RAL 9005
Intense black
Código HEX: #0e0e10




LOCKS



Key lock
For metal doors




Latch bolt
For melamine doors
For HPL doors
For methacrylate doors




Padlockable Polyamide Lock
For metal doors



Padlockable Metallic Lock 1
For metal doors



Padlockable Metallic Lock 2
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



Metal handle
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




Coin-operated Lock (coin-return)
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




Coin-operated Lock + Coin Collect Box
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



Lock of 4 manual digits with emergency key
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



TELEC
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



PROXI
Electronic lock of proximity
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



TELOCK
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




SOLOCK
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



FYLOCK
Electronic lock
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




OPTIONS



Mailbox slot




Slope top
RAL 7035 colour

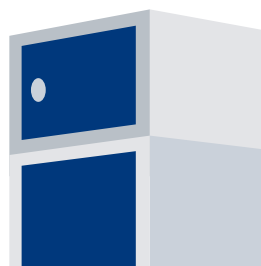


Upper small joined jocker
Body RAL 7035 and doors in
RAL 7035 or RAL 5010



Decorative end panel
RAL 7035 colour




Centre part division
ECO V-40 series




Mirror




Antibacterian paint

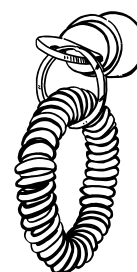


Elastic bracelet
With numbering option

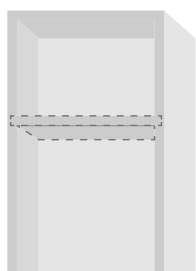


Additional shelf



Shoe rack



Structure made of
stainless steel AISI 304

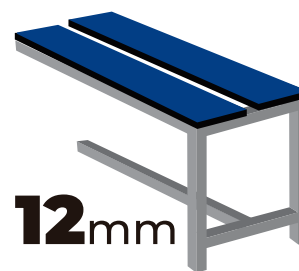


HPL slats




COMBINATIONS AND DIMENSIONS


ECO GYM PRO SERIES

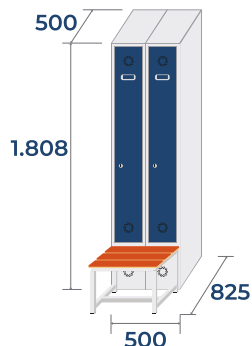


ECOGYM-25/2 PRO




ECOGYM-25/3 PRO

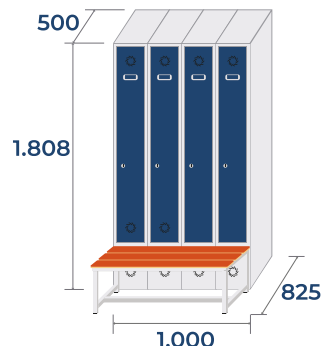


ECOGYM-25/4 PRO




ECOGYM-30/2 PRO

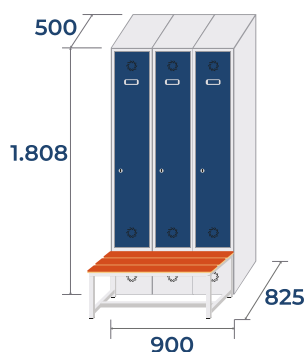


ECOGYM-30/3 PRO

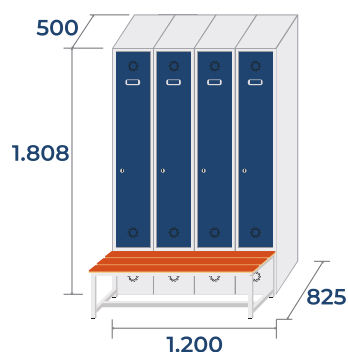


ECOGYM-30/4 PRO

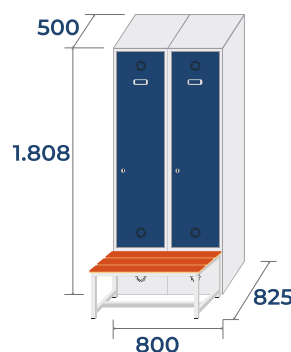

ECOGYM-40/2 PRO

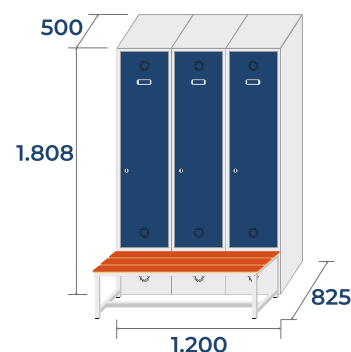

ECOGYM-40/3 PRO

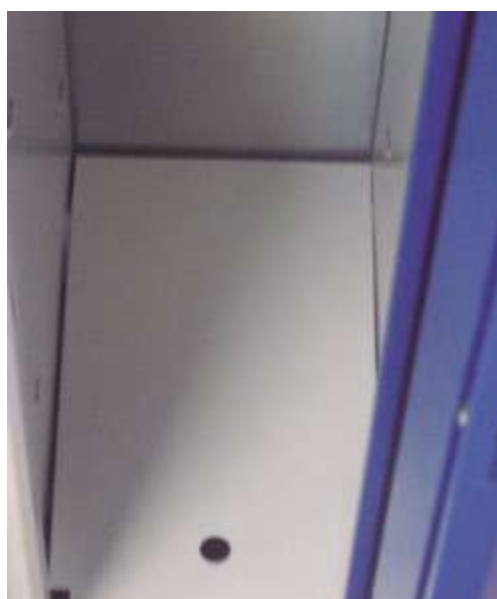



WALL FIXING

Installation recommendation

It is recommended to secure the locker to the wall to ensure stability and prevent tipping during use. Select the most suitable screws, washers and plugs according to the type of wall to which the unit will be anchored.

Fittings not included.

