

TECHNICAL DATA SHEET
BENCHES
HPL BENCHES



SERIES



BANC-1-1000-FEN



BANC-2-1000-FEN-DC



BANC-3-1500-FEN



BANC-3-1500-FEN-DC



BANC-PARED-1500-FEN



REP-FEN-1500

CHARACTERISTICS

Chassis

Made of steel tube of 1.5 mm thickness.

Painted in grey RAL 7035 Micro-textured finish. Minimum thickness of the coating: 50 microns.

Frame, tubes and legs made of steel tube of 30x30 mm.

Shoe rack made of steel tubes of 20x10 mm.

Great resistance.

Feet and tubes for the coat hooks and upper rack with PVC stops.

With adjustable plug for legs.

Seat, shoe-rack, hooks and upper rack

Made with compact slats of phenolic resins (High Pressure Laminated HPL).

Rigid material, hydrophobic, antibacterial and recommended for wet areas.

Highly resistant against wear, that is why it is ideal for applications with a high index of use and frequent cleaning.

Core of black/ brown colour.

According to the european norms EN 438-1 and EN 438-2.

Density 1450 Kg/m³ according to DIN 53479.

Water-absorbption of less than 3%.

Panel of 10 mm thickness.

Rounded edges.

Maintenance-free.

Easy cleaning


The nonporous surface repels dirt. Easy cleaning, with normal chemical detergents or with sanitizing products, against which the material is inalterable. In case of cleaning it from graffitis it can be used an organic dissolvent without risk of alteration of the colour. Resistant against food residuals and colourants, as they do not affect neither the properties nor the appearance of the HPL (phenolic material).

Steel wool or similar products, are absolutely not recommended, as they would damage the surface with scratches and so produce little stabs of corrosion. Pay special attention at the use of materials which contain chlorides, as they are contraindicated, because they cause oxidation. Hydrochloric acid or iron products in a prolonged contact are also not recommended. Do never use common steel detergents for stainless steel. IMPORTANT: Dry well the metal components (tubes).


Complements

Hooks made of zamak (Alloy of zinc with aluminium, magnesium and copper. Hardness and good mechanical resistance).

HPL COLOURS (SLATS)




WHITE
F-085



LIGHT GREY
F-0074




DARK BLUE
M-0717



DARK GREY
F-0077



RED
F-0210



CREAM
F-0851



YELLOW
F-0010



ORANGE
F-0011



LIGHT GREEN
F-0725




DARK GREEN
F-0591



TURQUOISE
F-0876




BURGUNDY
F-0318




LIGHT BLUE
F-0718




ALUMINIUM
F-0193



BLACK
F-0080




LIGHT WOOD
FM-100



DARK WOOD
FM-200




ASH OAK
F-3235



ROCK CEMENT
F-0026




EARTH CEMENT
F-0027



CHOCOLATE
F-0863

METALLIC COLOURS (CHASSIS)

STANDARD COLOUR



RAL 7035
Luminous grey
Código HEX: #c5c7c4

GROUP 1



RAL 5010
Gencana blue
Código HEX: #004f7c

RAL 9010
Pure white
Código HEX: #f1ece1

RAL 3000
Red
Código HEX: #a72920

RAL 6034
Pastel turquoise
Código HEX: #7aacac

RAL 7016
Anthracite grey
Código HEX: #383e42

RAL 9005
Intense black
Código HEX: #0e0e10

GROUP 2



RAL 9001
Cream white
Código HEX: #e9e0d2

RAL 1017
Saffron yellow
Código HEX: #f6a950

RAL 1021
Rapeseed yellow
Código HEX: #f6b600

RAL 2004
Pure orange
Código HEX: #e25303

RAL 3017
Pink
Código HEX: #cb555d



RAL 3005
Wine red
Código HEX: #59191f

RAL 4005
Lilac
Código HEX: #76689a

RAL 6029
Mint green
Código HEX: #006f3d

RAL 5015
Sky blue
Código HEX: #007cb0


RAL 5023
Distant blue
Código HEX: #42698c




RAL 9006
White aluminium
Código HEX: #a1a1a0

RAL 7036
Platinum grey
Código HEX: #979392

OPTIONS




Floor fixing




Rack options

COMBINATIONS AND DIMENSIONS


BANC-PARED-FEN SERIES



BANC-PARED-1000-FEN
9kg · 0,13m³



BANC-PARED-1500-FEN
15kg · 0,2m³




BANC-PARED-2000-FEN
21kg · 0,26m³


BANC-1-FEN SERIES



BANC-1-1000-FEN
12kg · 0,16m³




BANC-1-1500-FEN
18kg · 0,24m³

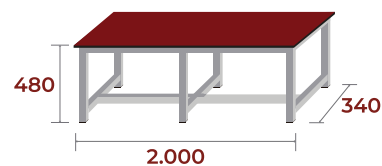


BANC-1-2000-FEN
24kg · 0,33m³


BANC-2-FEN SERIES

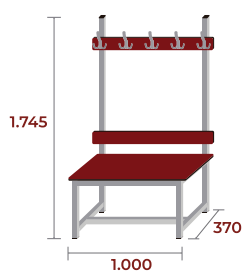


BANC-2-1000-FEN
24kg · 0,23m³ · 5 ↓

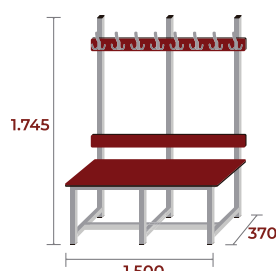


BANC-2-1500-FEN
32kg · 0,3m³ · 8 ↓

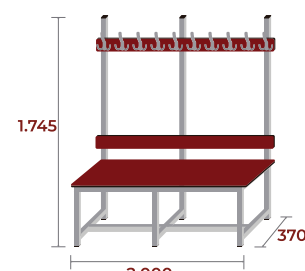


BANC-2-2000-FEN
37kg · 0,31m³ · 10 ↓

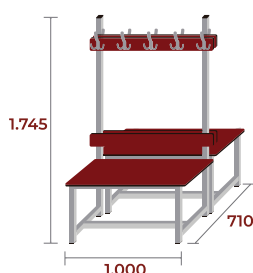

BANC-2-1000-FEN
48kg · 0,46m³ · 10 ↓




BANC-2-1500-FEN
64kg · 0,6m³ · 16 ↓

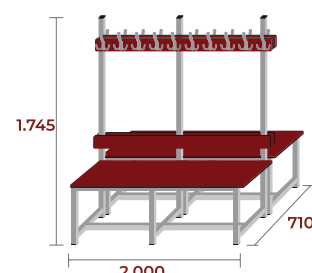


BANC-2-2000-FEN
74kg · 0,62m³ · 20 ↓

COMBINATIONS AND DIMENSIONS


BANC-3-FEN SERIES

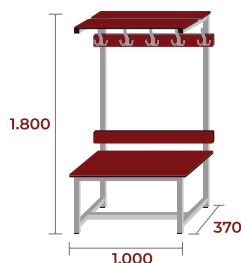


BANC-3-1000-FEN
31,5kg · 0,23m³ · 5 ↓

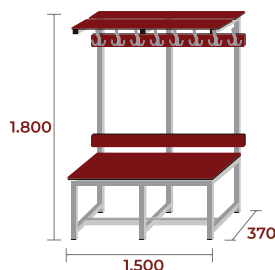


BANC-3-1500-FEN
38,5kg · 0,3m³ · 8 ↓

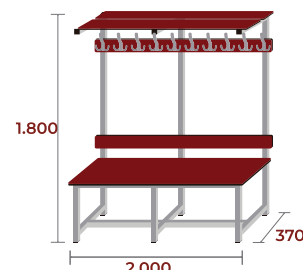


BANC-3-2000-FEN
43,5kg · 0,31m³ · 10 ↓



BANC-3-1000-FEN
63kg · 0,46m³ · 10 ↓



BANC-3-1500-FEN
77kg · 0,6m³ · 16 ↓



BANC-3-2000-FEN
87kg · 0,62m³ · 20 ↓

PER-FEN SERIES



PER-FEN-1000
3kg · 0,009m³ · 5 ↓




PER-FEN-1500
5kg · 0,013m³ · 8 ↓




PER-FEN-2000
8kg · 0,018m³ · 10 ↓


REP-FEN SERIES



REP-FEN-1000
8kg · 0,11m³ · 5 ↓

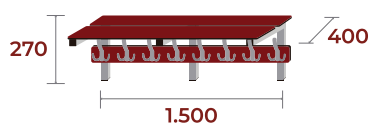

REP-FEN-1500
11kg · 0,16m³ · 8 ↓



REP-FEN-2000
14kg · 0,22m³ · 10 ↓