

TECHNICAL DATA SHEET
MONOBLOK LOCKERS
V, T, M, C, P, B, Z and L SERIES





SERIES



SV SERIES
1 door per column



ST SERIES
2 doors per column



SM SERIES
3 doors per column



SC SERIES
4 doors per column



SP SERIES
5 doors per column



SB SERIES
6 doors per column



SZ SERIES
8 doors per column



S10 SERIES
10 doors per column



SL2 SERIES
2 L-shaped doors per column



CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 0.6 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

100% recyclable steel.

Body

Painted in grey RAL 7035 Micro-textured paint finish. Minimum thickness of 50 micrometer.

Welded shelf and coat rod at the SV-Series.

Coat rod at the ST-Series.

Steel legs (of 1.5 mm thickness) with polyethylene caps in black colour included.

Metal doors

Painted in blue RAL 5010 or grey RAL 7035, micro-textured finish.

Minimum thickness of 50 microns.

Doors with perimetric double folding.

Borders without cutting edges. Hidden hinges.

With name-card holder.

With ventilation rosettes at the models SV, ST, SM, SC, SP, SB and SZ.

Chromed standard cylinder locks with two keys per lock.

Door with longitudinal reinforcement in the SV and ST-40 models.

L-shaped with longitudinal reinforcement and hidden hinges (SL2 series).

Melamine doors

Doors in melamine or hydrophobic melamine of one design at two faces. 19 mm thicknesses. PVC-edged. PVC edging in the same colour as the door.

HPL doors

Made of HPL-panels of phenolic resins of 12 mm thickness.

Methacrylate doors

Transparent methacrylate door of 10 mm thickness.

Cleaning

It can be easily cleaned with neutral, non-aggressive cleaning agents such as glass cleaners, all-purpose cleaners, etc., using a soft cloth. Steel wool or similar products are not recommended, as they may scratch the surface and create corrosion pitting. Do not use materials containing chlorides, as they are contraindicated as they cause rust. Hydrochloric acid or iron products in prolonged contact are also not recommended.

VERY IMPORTANT: After using the product, it must be thoroughly dried (with a soft cloth) as moisture will cause corrosion on the metal lockers.



METALLIC COLOURS

STANDARD COLOURS



RAL 5010
Gencana blue
Código HEX: #004f7c



RAL 7035
Luminous grey
Código HEX: #c5c7c4

GROUP 1




RAL 9010
Pure white
Código HEX: #f1ece1




RAL 3000
Red
Código HEX: #a72920



RAL 6034
Pastel turquoise
Código HEX: #7aacac




RAL 7016
Anthracite grey
Código HEX: #383e42



RAL 9005
Intense black
Código HEX: #0e0e10

GROUP 2



RAL 9001
Cream white
Código HEX: #e9e0d2



RAL 1017
Saffron yellow
Código HEX: #f6a950



RAL 1021
Rapeseed yellow
Código HEX: #f6b600



RAL 2004
Pure orange
Código HEX: #e25303



RAL 3017
Pink
Código HEX: #cb555d



RAL 3005
Wine red
Código HEX: #59191f



RAL 4005
Lilac
Código HEX: #76689a



RAL 6029
Mint green
Código HEX: #006f3d



RAL 5015
Sky blue
Código HEX: #007cb0



RAL 5023
Distant blue
Código HEX: #42698c



RAL 9006
White aluminium
Código HEX: #a1a1a0




RAL 7036
Platinum grey
Código HEX: #979392




MELAMINE COLOURS

WATER-RESISTANT MELAMINE COLOURS

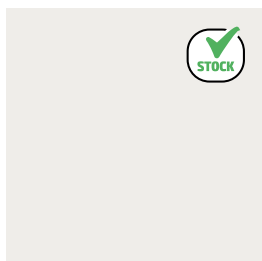

WHITE
M-060

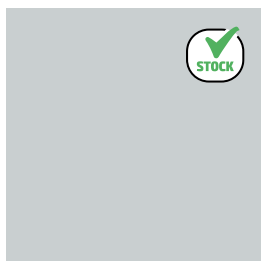


LIGHT GREY
M-34W



RED
M-172




DARK BLUE
M-55C

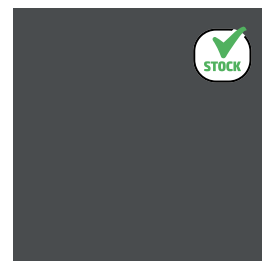

DARK GREY
M-4AT

MELAMINE COLOURS



CREAM
M-183




YELLOW
M-22G



ORANGE
M-28G



GREEN
M-023



LIGHT BLUE
M-U522



ALUMINIUM
M-72E



BLACK
M-231




BEECH
MM-240




ACACIA
M-50D




CALEDONIAN OAK
M-515



JOPLIN OAK
M-17N




JACKET OAK
M-75V



TAIGA ASH
M-18N




APOLO CEMENT
M-99Q




TEIDE CEMENT
M-06F




HPL COLOURS




WHITE
F-085




LIGHT GREY
F-0074

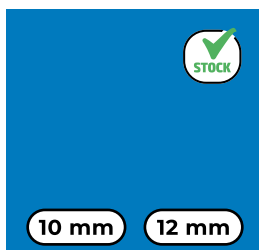

DARK BLUE
M-0717




DARK GREY
F-0077




RED
F-0210




CREAM
F-0851



YELLOW
F-0010



ORANGE
F-0011




LIGHT GREEN
F-0725




DARK GREEN
F-0591




TURQUOISE
F-0876




BURGUNDY
F-0318

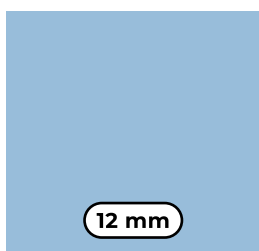

LIGHT BLUE
F-0718




ALUMINIUM
F-0193




BLACK
F-0080



LIGHT WOOD
FM-100



DARK WOOD
FM-200



ASH OAK
F-3235



ROCK CEMENT
F-0026



EARTH CEMENT
F-0027




CHOCOLATE
F-0863




LOCKS



Key lock
For metal doors




Latch bolt
For melamine doors
For HPL doors
For methacrylate doors




Padlockable Polyamide Lock
For metal doors




Padlockable Metallic Lock 1
For metal doors



Padlockable Metallic Lock 2
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



Metal handle
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




Coin-operated Lock (coin-return)
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




Coin-operated Lock + Coin Collect Box
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



Lock of 4 manual digits with emergency key
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



TELEC
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



PROXI
Electronic lock of proximity
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




TELOCK
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors



SOLOCK
Electronic lock combination
For metal doors
For melamine doors
For HPL doors
For methacrylate doors




OPTIONS



Mailbox slot




Slope top
RAL 7035 colour

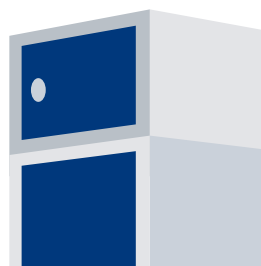


Upper small joined jocker
Body RAL 7035 and doors in
RAL 7035 or RAL 5010



Decorative end panel
RAL 7035 colour

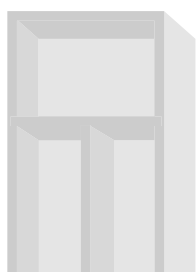


Centre part division
SV-40 series




Socle
Galvanized steel, painted
steel or stainless steel




Antibacterian paint

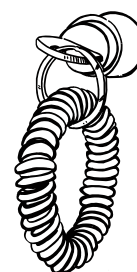


Elastic bracelet
With numbering option

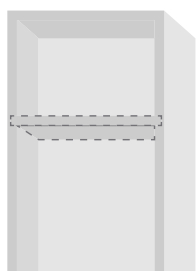

Additional shelf

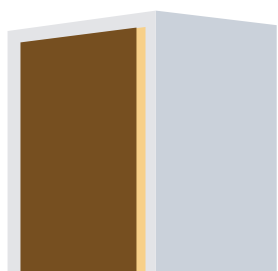


Melamine door
SV, ST, SM, SC, SP, SB and SZ

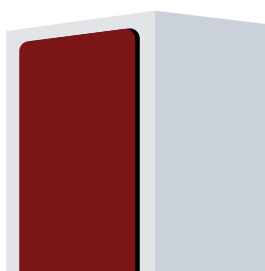


HPL door

SV, ST, SM, SC, SP, SB, SZ and
SL2



Methacrylate door
ST, SM, SC, SP, SB and SZ

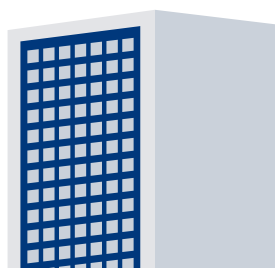


Grilled door
SV, ST, SM, SC, SP, SB and SZ




COMBINATIONS AND DIMENSIONS


SV SERIES




SV-25/1
18,5kg · 0,24m³




SV-25/2
31kg · 0,48m³




SV-25/3
44,5kg · 0,71m³




SV-25/4
57kg · 0,95m³




SV-30/1
20,6kg · 0,29m³




SV-30/2
35,2kg · 0,57m³




SV-30/3
49,8kg · 0,86m³




SV-30/4
64,4kg · 1,14m³




SV-40/1
25kg · 0,38m³




SV-40/2
45kg · 0,76m³



SV-40/3
65kg · 1,14m³




SV-50/1
28kg · 0,48m³




SV-50/2
51kg · 0,95m³


ST SERIES




ST-25/1
18,4kg · 0,24m³




ST-25/2
30,8kg · 0,48m³




ST-25/3
44,2kg · 0,71m³




ST-25/4
56,6kg · 0,95m³



ST-30/1
19,8kg · 0,29m³




ST-30/2
33,6kg · 0,57m³




ST-30/3
47,4kg · 0,86m³




ST-30/4
62,2kg · 1,14m³




ST-40/1
23kg · 0,38m³




ST-40/2
41kg · 0,76m³



ST-40/3
59kg · 1,14m³



ST-50/1
26kg · 0,48m³




ST-50/2
47kg · 0,95m³




COMBINATIONS AND DIMENSIONS


SM SERIES




SM-25/1
19,6kg · 0,24m³




SM-25/2
33,2kg · 0,48m³




SM-25/3
46,7kg · 0,71m³




SM-25/4
60,3kg · 0,95m³




SM-30/1
21kg · 0,29m³




SM-30/2
36kg · 0,57m³




SM-30/3
51kg · 0,86m³




SM-30/4
66kg · 1,14m³




SM-40/1
23,9kg · 0,38m³




SM-40/2
41,8kg · 0,76m³



SM-40/3
59,7kg · 1,14m³




SM-50/1
25,8kg · 0,48m³




SM-50/2
46,6kg · 0,95m³


SC SERIES




SC-25/1
20kg · 0,24m³




SC-25/2
34,2kg · 0,48m³




SC-25/3
48,8kg · 0,71m³




SC-25/4
63,4kg · 0,95m³




SC-30/1
21,5kg · 0,29m³




SC-30/2
37,1kg · 0,57m³




SC-30/3
53,1kg · 0,86m³




SC-30/4
69,2kg · 1,14m³




SC-40/1
25kg · 0,38m³




SC-40/2
44kg · 0,76m³



SC-40/3
63kg · 1,14m³



SC-50/1
27,8kg · 0,48m³




SC-50/2
49,6kg · 0,95m³




COMBINATIONS AND DIMENSIONS

SP SERIES

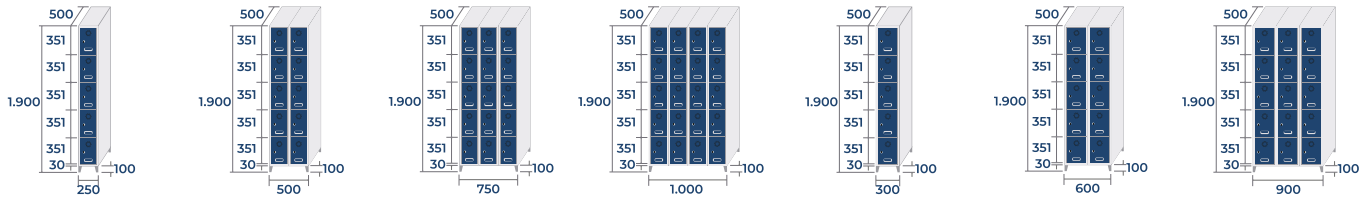


SP-25/1 20,6kg · 0,24m³ **SP-25/2** 36,2kg · 0,48m³ **SP-25/3** 51,8kg · 0,71m³ **SP-25/4** 67,4kg · 0,95m³ **SP-30/1** 22kg · 0,29m³ **SP-30/2** 39,1kg · 0,57m³ **SP-30/3** 56,1kg · 0,86m³

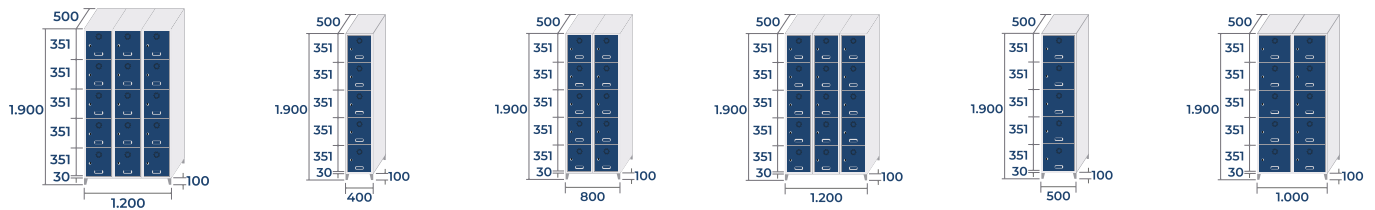


SP-30/4 73,2kg · 1,14m³ **SP-40/1** 26kg · 0,38m³ **SP-40/2** 46kg · 0,76m³ **SP-40/3** 66kg · 1,14m³ **SP-50/1** 28,8kg · 0,48m³ **SP-50/2** 51,6kg · 0,95m³

SB SERIES

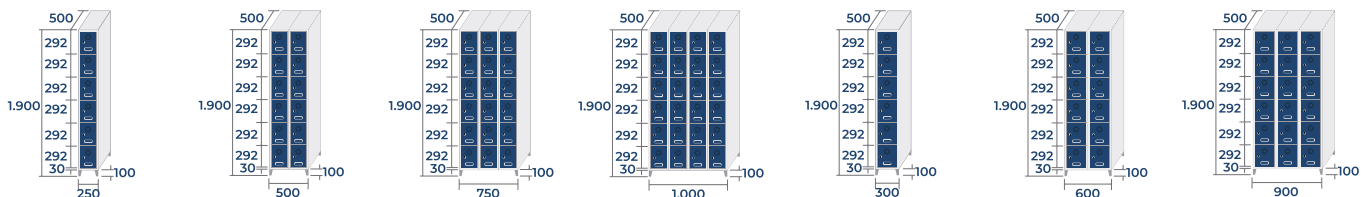

SB-25/1 21,6kg · 0,24m³ **SB-25/2** 38,2kg · 0,48m³ **SB-25/3** 54,8kg · 0,71m³ **SB-25/4** 71,4kg · 0,95m³ **SB-30/1** 23kg · 0,29m³ **SB-30/2** 41,1kg · 0,57m³ **SB-30/3** 59,1kg · 0,86m³

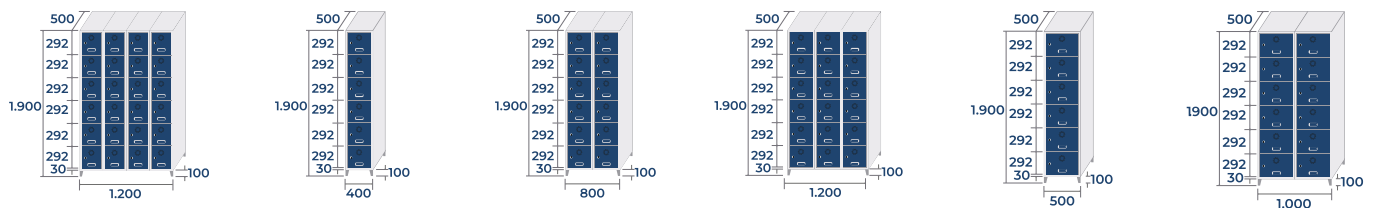


SB-30/4 72,2kg · 1,14m³ **SB-40/1** 27kg · 0,38m³ **SB-40/2** 48kg · 0,76m³ **SB-40/3** 69kg · 1,14m³ **SB-50/1** 29,8kg · 0,48m³ **SB-50/2** 53,6kg · 0,95m³




COMBINATIONS AND DIMENSIONS


SZ SERIES




SZ-25/1
23,6kg · 0,24m³




SZ-25/2
42,2kg · 0,48m³




SZ-25/3
60,8kg · 0,71m³




SZ-25/4
79,4kg · 0,95m³




SZ-30/1
25kg · 0,29m³




SZ-30/2
45,1kg · 0,57m³




SZ-30/3
65,1kg · 0,86m³




SZ-30/4
85,2kg · 1,14m³




SZ-40/1
29kg · 0,38m³




SZ-40/2
52kg · 0,76m³



SZ-40/3
75kg · 1,14m³




SZ-50/1
31,8kg · 0,48m³




SZ-50/2
57,6kg · 0,95m³


S10 SERIES




S10-25/1




S10-25/2




S10-25/3




S10-25/4




S10-30/1




S10-30/2




S10-30/3




S10-30/4




S10-40/1




S10-40/2



S10-40/3



S10-50/1




S10-50/2




COMBINATIONS AND DIMENSIONS


SL SERIES




SL-30/1
21kg · 0,27m³




SL-30/2
37,1kg · 0,54m³




SL-30/3
53,1kg · 0,81m³

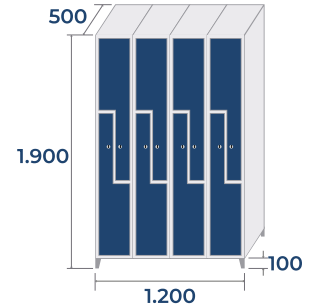


SL-30/4
69,1kg · 1,08m³



SL-40/1
25kg · 0,36m³



SL-40/2
44kg · 0,72m³



SL-40/3
63kg · 1,08m³



INTERIOR MEASUREMENTS

250 300 400 500

| | Height x Width x Depth | Height x Width x Depth | Height x Width x Depth | Height x Width x Depth |
|------------|---------------------------|---------------------------------|----------------------------------|---------------------------|
| SV | 1.724x183 x451 mm | 1.724x233 x451 mm | 1.724x333 x451 mm | 1.724x433 x451 mm |
| ST | 847x183 x451 mm | 847x233 x451 mm | 847x333 x451 mm | 847x433 x451 mm |
| SM | 554x183 x451 mm | 554x233 x451 mm | 554x333 x451 mm | 554x433 x451 mm |
| SC | 408x183 x451 mm | 408x233 x451 mm | 408x333 x451 mm | 408x433 x451 mm |
| SP | 320x183 x451 mm | 320x233 x451 mm | 320x333 x451 mm | 320x433 x451 mm |
| SB | 262x183 x451 mm | 262x233 x451 mm | 262x333 x451 mm | 262x433 x451 mm |
| SZ | 189x183 x451 mm | 189x233 x451 mm | 189x333 x451 mm | 189x433 x451 mm |
| S10 | 153x183 x451 mm | 153x233 x451 mm | 153x333 x451 mm | 153x433 x451 mm |
| SL | | 1.223/480 x93/223 x477 mm | 1.223/480 x143/323 x477 mm | |



WALL FIXING

Installation recommendation

It is recommended to secure the locker to the wall to ensure stability and prevent tipping during use. Select the most suitable screws, washers and plugs according to the type of wall to which the unit will be anchored.

Fittings not included.

